

DOMINO 24

DOMINO 48

Memory Lighting Control Desk 24 or 48 Channels



Description

- 24 faders in 2-preset mode or 48 faders in extended mode on DOMINO 48 - 12/24 faders on DOMINO 24.
- 24 faders configurable as channels, submasters or playbacks on DOMINO 48 - 12 faders on DOMINO 24.
- Theatrical dipless crossfade with 2 general masters, stage and preset, and dedicated buttons.
- Minimum of 500 theatrical memories to easily create and modify theatrical playbacks.
- Individual In (Up) and Out (Down) fade times for each memory and for each submaster.
- Up to 216 submasters on the DOMINO 48 – 108 on the DOMINO 24.
- Up to 216 chasers on the DOMINO 48 – 108 on the DOMINO 24; up to 250 steps of a chaser can be recorded as Channels, Memory or Snapshot of the output.
- Flash/Assign pushbuttons with LED for each of the 48 faders on the DOMINO 48 – 24 on the DOMINO 24.
- Up to 25 submasters on DOMINO 48 can be played simultaneously – 13 on the DOMINO 24.
- LED display showing status information via scrolling messages.
- On DOMINO 24 U & 48 U as standard, and on DOMINO 24 & 48 as retrofit option:
 - 1 SVGA output for displaying memories, patch, texts and help menus in multiple languages.
 - 1 USB connector for show recording and software update.
 - MIDI IN/OUT connector for MIDI functionality.
- 1 Physical DMX512/1990 output on XLR-5F connector.
- Fully proportional patch to 512 dimmers.

References

- DOMINO 24** - 24 channels - 512 DMX addresses
DOMINO 24 U - 24 channels - 512 DMX addresses
+ USB option
DOMINO 48 - 48 channels - 512 DMX addresses
DOMINO 48 U - 48 channels - 512 DMX addresses
+ USB option

Supplied with :

- power supply cable with CEE 7-7 plug

Option

- USB option for retrofitting on DOMINO 24 & 48 and providing:
 - 1 SVGA output for displaying memories, patch, texts and help menus in multiple languages.
 - 1 USB connector for show recording and software update.
 - MIDI IN/OUT connector for MIDI functionality.

USB/DOM

Accessories

- USB memory stick
- XLR3 “gooseneck” desk lamp
- Dust cover for DOMINO 24
- Dust cover for DOMINO 48
- Flight case for DOMINO 24
- Flight case for DOMINO 48

**FLASHMEM
WORKLITE/XLR3
DC/DOM24
DC/DOM48
FLY/DOM24
FLY/DOM48**

Characteristics

Power requirements: 90-260 V, 47-63 Hz power supply with automatic detection.

Dimensions

DOMINO 24

(Width x Depth x Height): 464 x 367 x 115 mm

Net weight: 7.5 kg

DOMINO 48


(Width x Depth x Height): 684 x 367 x 115 mm

Net weight: 10.5 kg

DOMINO 24


DOMINO 48

Front display layout

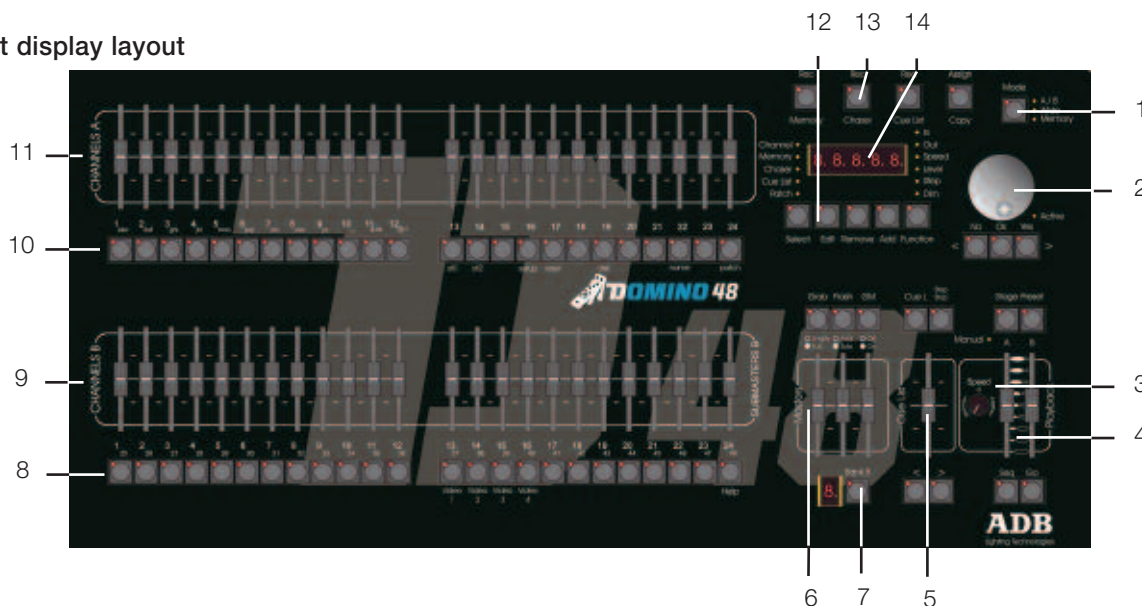

- | | |
|--|--------------------------------|
| 1 Mode button - A/B, Wide & Memory modes | 8 Flash buttons |
| 2 Wheel for editing | 9 Channel and submaster faders |
| 3 Speed control rotating fader | 10 Flash buttons |
| 4 Theatrical dipless crossfade with 2 faders, stage and preset masters and dedicated buttons | 11 Channel faders |
| 5 Cue list fader | 12 Edit buttons |
| 6 Master faders | 13 Record buttons |
| 7 Bank button | 14 On board LED display |

Connector layout

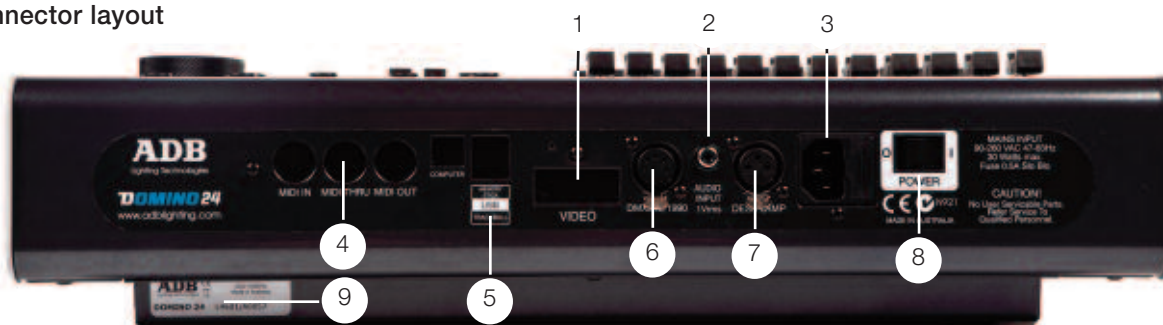

- | | |
|--|---|
| 1. Video Output: Mini DB 15 female connector for video output. | 4. MIDI (IN, THRU, OUT): 3 DIN 5 sockets (5 female contacts) following MIDI standard. |
| 2. Audio Input: RCA (phono) type socket to accept an audio signal. The audio signal should have a nominal level of 1 volt RMS (line level). | 5. USB: 1 USB in and 2 USB out sockets following USB standard. |
| 3. Mains Input: Standard power supply connector type IEC320 - C14. Mains Input socket is fused with a M205 sized 500mA fuse. | 6. DMX: DMX512/1990 output connector (5 pin female XLR connector) following DMX512 standard. |
| | 7. Desk Lamp: XL3 output connector (3 pin female XLR connector) – 12 VDC |
| | 8. Power Switch |
| | 9. Product identity plate: product name and serial number. |

This equipment complies with all applicable European directives and carries a CE mark.

ADB - Your Partner for Light

Belgium	N.V. ADB-TTV Technologies S.A. (Group Headquarters) Leuvensesteenweg 585, B-1930 Zaventem Tel : +32.2.709.32.11, Fax : +32.2.709.32.80, E-Mail : adb@adblighting.com
France	ADB S.A.S. Sales Office: 92, Avenue Jean Jaurès F-92120 Montrouge Tel : +33.1.41.17.48.50, Fax : +33.1.42.53.54.76, E-Mail : adb.fr@adblighting.com Factory & Group Logistics Centre: Zone industrielle Rouvroy F-02100 Saint-Quentin Tel : +33.3.23.06.35.70, Fax : +33.3.23.67.66.56, E-Mail : adb.fr@adblighting.com

ADB
Lighting Technologies

DS-1163-E-01r Subject to modifications