

EUROPE RANGE

Zoom Profile Spotlights with Condenser Optics
for 1000 / 1200 W Halogen Lamps



The profile spotlights of the EUROPE range are intended to fulfil the requirements of the most demanding Lighting Designers who, in their own interest, should always carry out comparative tests.

The use for all lenses of special optical glass with anti-reflection coating in addition to high performance, 2-lens condenser optics results in a spectacular light output, an even light distribution and a unique beam edge sharpness.

Zoom focusing is smooth and stable in any position, and allows very accurate beam control. A zoom scale facilitates repetitive adjustments. A PC like soft edge beam can be obtained through the insertion in the zoom of a glass diffuser (option).

Beam shaping and imaging are achieved comfortably by 4 shutters working in 2 planes, an iris diaphragm or a size A gobo.

A front cassette allows one-hand insertion of a colour frame and any DIN 15560 accessory.

These spotlights are rebalanceable in any position by sliding the yoke along 2 slots provided over the full length of the unit. The yoke can be adjusted to a low or high position, a useful facility when space is limited. The tiltlock mechanism is easy and comfortable.

The lamp house which contains the shutter set and the effects slot is rotatable through 360° with respect to the lens tube and vice-versa.

Depending on the yoke position, the operator can either rotate the projected image, or move the focus controls to a preferred position, or correct the lamp position back to the vertical when the spotlight is mounted on a sloping bar.

Professional mechanical design, rugged and modular construction from injected and extruded aluminium, anti-corrosion treatment of all metal components and high quality finish guarantee reliable operation over a very long lifetime.

In addition to meeting current international safety standards, these spotlights provide several additional features which make them very safe to operate.

Options : pole operation and motorisation

- Exceptional light output
- Unparalleled light quality
- Simple, highly robust construction
- Harmonious, elegant and unobtrusive design
- Easy to handle
- Wide range of accessories
- Very favourable cost/performance ratio

EUROPE

Zoom Profile Spotlights 1000 / 1200 W

SPECIFICATIONS

HOUSING

- The housing is built in 2 sections:
 - The lens tube fitted with a front cassette which provides 2 sets of runners for insertion of 185 x 185 mm (245 x 245 mm for DN 105) DIN 15560 accessories. The cassette is designed for preventing light spill. It can be easily removed and rotated in any position at 90°.
 - The lamp house equipped with a spring-loaded 4-shutter gate assembly and extended runners for a drop-in iris diaphragm and a gobo-holder.
- The lens tube and the lamp house are fitted with sliding lids for easy access to lenses and lamp.
- The lamp house is rotatable through 360° with respect to the lens tube and vice-versa. Effective clamping without any tool. A click-stop detent helps finding the normal position.
- The shutter gate contains 4 removable, stainless steel beam shaping shutters with anti-reflection coating, working in 2 planes.
- The back-end plate is fitted with a strong grab handle and CEE 22 power connector.
- Front and back-end plates of injected aluminium.
- Main body of extruded aluminium sections.
- Overall finish in non-reflective, heat and wear resisting black paint.

POSITIONING MECHANISM

- A strong steel yoke, with positive tiltlock mechanism on both sides, can slide along 2 slots provided over the full length of the housing to allow spotlight balance in any position.
- Clamping is by one clutch type handle which does not interfere with the shutters.
- 2 sets of holes in the yoke arms to allow high or low positioning of the spotlight.
- 5 holes in the transverse arm of the yoke for fixing on a hook clamp or a DIN 15560 plate.
- Slanted yoke available as an option.

OPTICAL SYSTEM

- Spherical reflector of pure, polished, anodised aluminium.
- Aspherical condenser lens.
- Intermediate spherical lens.
- Zoom optics consisting of 2 to 4 polished plano-convex lenses.
- All lenses with anti-reflection coating.
- Optional zoom glass diffuser for sharp to soft edge beam conversion.
- Focusing mechanism with smooth control by 2 screw knobs + zoom scale for easy repetitive adjustments.
- Knob for beam edge sharpness fine adjustment.
- Upper and lower guides for respectively 1000 and 1200 W lamps.

ELECTROMECHANICAL COMPONENTS

- 2 m silicone power cable (2 x 1.5 + 1.5 mm²) with CEE 22 female connector on the luminaire side.
- GX 9.5 lampholder for 220/240 V, 1000 or 1200 W tungsten halogen lamps with respectively 55 or 67 mm light centre length (LCL).


SAFETY / RELIABILITY

- This equipment complies with all applicable European directives and carries a CE mark.
- A safety mechanism prevents access to the lamp without first disconnecting the power cable.
- The power connector is secured by a stirrup.
- The spotlight does not present any sharp edge.
- An anchorage ring is provided for safety bond.
- Spring lock mechanisms prevent accidental drop-out of accessories.
- All handles and control knobs are heat insulated.
- All metal parts are protected against corrosion.



EUROPE

Zoom Profile Spotlights 1000 / 1200 W

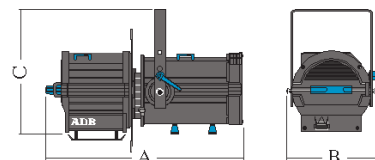

PHOTOMETRIC DATA

Typical values

DW 105 15° - 38°

3 zoom lenses and condenser optics.

Dimensions

(A x B x C) : 710 x 340 x 420 mm

Net weight : 14 kg

Packing : 760 x 370 x 340 mm

Gross weight : 15.5 kg

12 units per pallet

		(m)	2.5	5	7.5	10	12.5	15	17.5	20
1200 W / 30,000 lm	Distance	(m)	2.5	5	7.5	10	12.5	15	17.5	20
	Min. Angle : 15°	Ø Beam	(m)	0.7	1.3	2	2.6	3.3	3.9	4.6
Max. Angle : 38°	Light level	(lux)	32 640	8 160	3 630	2 040	1 300	910	670	510
	Ø Beam	(m)	1.7	3.4	5.2	6.9	8.6	10.3	12.1	13.8
1000 W / 26,000 lm	Light level	(lux)	8 500	2 120	940	530	340	240	170	130
	Min. Angle : 15°	Ø Beam	(m)	0.7	1.3	2	2.6	3.3	3.9	4.6
Max. Angle : 38°	Light level	(lux)	27 200	6 800	3 020	1 700	1 090	760	560	425
	Ø Beam	(m)	1.7	3.4	5.2	6.9	8.6	10.3	12.1	13.8
	Light level	(lux)	6 720	1 680	750	420	270	190	137	105

DVW 105 38° - 57°

4 zoom lenses and condenser optics.

Dimensions

(A x B x C) : 600 x 340 x 420 mm

Net weight : 13.5 kg

Packing : 650 x 370 x 340 mm

Gross weight : 15 kg

12 units per pallet

		(m)	1.5	3	4.5	6	7.5	9	10.5	12
1200 W / 30,000 lm	Distance	(m)	1.5	3	4.5	6	7.5	9	10.5	12
	Min. Angle : 38°	Ø Beam	(m)	1	2.1	3.1	4.1	5.2	6.2	7.2
Max. Angle : 57°	Light level	(lux)	22 222	5 556	2 469	1 389	889	617	454	347
	Ø Beam	(m)	1.6	3.3	4.9	6.5	8.1	9.8	11.4	13
1000 W / 26,000 lm	Light level	(lux)	11 556	2 889	1 284	722	462	321	236	181
	Min. Angle : 38°	Ø Beam	(m)	1	2.1	3.1	4.1	5.2	6.2	7.2
Max. Angle : 57°	Light level	(lux)	18 222	4 556	2 025	1 139	729	506	372	285
	Ø Beam	(m)	1.6	3.3	4.9	6.5	8.1	9.8	11.4	13
	Light level	(lux)	8 889	2 222	988	556	356	247	181	139

DS 105 15° - 31°

2 zoom lenses and condenser optics.

Dimensions

(A x B x C) : 710 x 340 x 420 mm

Net weight : 14 kg

Packing : 760 x 370 x 340 mm

Gross weight : 15.5 kg

12 units per pallet

		(m)	2.5	5	7.5	10	12.5	15	17.5	20
1200 W / 30,000 lm	Distance	(m)	2.5	5	7.5	10	12.5	15	17.5	20
	Min. Angle : 15°	Ø Beam	(m)	0.7	1.3	2	2.6	3.3	4	4.6
Max. Angle : 31°	Light level	(lux)	41 600	10 400	4 620	2 600	1 660	1 160	850	650
	Ø Beam	(m)	1.4	2.8	4.2	5.6	6.9	8.3	9.7	11
1000 W / 26,000 lm	Light level	(lux)	14 400	3 600	1 600	900	580	400	295	225
	Min. Angle : 15°	Ø Beam	(m)	0.7	1.3	2	2.6	3.3	4	4.6
Max. Angle : 31°	Light level	(lux)	33 280	8 320	3 700	2 080	1 330	925	680	520
	Ø Beam	(m)	1.4	2.8	4.2	5.6	6.9	8.3	9.7	11
	Light level	(lux)	12 000	3 000	1 330	750	480	330	245	190

DSN 105 11° - 23°

2 zoom lenses and condenser optics.

Dimensions

(A x B x C) : 790 x 340 x 420 mm

Net weight : 15.1 kg

Packing : 810 x 420 x 340 mm

Gross weight : 17.5 kg

9 units per pallet

		(m)	6	9	12	15	18	21	24	27
1200 W / 30,000 lm	Distance	(m)	6	9	12	15	18	21	24	27
	Min. Angle : 11°	Ø Beam	(m)	1.2	1.7	2.3	2.9	3.5	4	4.6
Max. Angle : 23°	Light level	(lux)	9 720	4 320	2 430	1 560	1 080	790	600	480
	Ø Beam	(m)	2.4	3.7	4.9	6.1	7.3	8.5	9.8	11
1000 W / 26,000 lm	Light level	(lux)	3 940	1 750	990	630	440	320	250	196
	Min. Angle : 11°	Ø Beam	(m)	1.2	1.7	2.3	2.9	3.5	4	4.6
Max. Angle : 23°	Light level	(lux)	7 440	3 310	1 860	1 190	830	610	465	370
	Ø Beam	(m)	2.4	3.7	4.9	6.1	7.3	8.5	9.8	11
	Light level	(lux)	3 330	1 480	830	530	370	270	210	165

DN 105 9° - 20°

2 zoom lenses and condenser optics.

Dimensions

(A x B x C) : 920 x 360 x 445 mm

Net weight : 18.4 kg

Packing : 930 x 420 x 370 mm


Gross weight : 21.5 kg

9 units per pallet

		(m)	6	9	12	15	18	21	24	27
1200 W / 30,000 lm	Distance	(m)	6	9	12	15	18	21	24	27
	Min. Angle : 9°	Ø Beam	(m)	0.9	1.4	1.9	2.4	2.8	3.3	3.8
Max. Angle : 20°	Light level	(lux)	16 670	7 410	4 170	2 670	1 850	1 360	1 040	820
	Ø Beam	(m)	2.1	3.2	4.3	5.3	6.35	7.4	8.5	9.5
1000 W / 26,000 lm	Light level	(lux)	4 720	2 100	1 180	760	525	385	295	230
	Min. Angle : 9°	Ø Beam	(m)	0.9	1.4	1.9	2.4	2.8	3.3	3.8
Max. Angle : 20°	Light level	(lux)	12 200	5 430	3 060	1 960	1 360	1 000	760	600
	Ø Beam	(m)	2.1	3.2	4.3	5.3	6.35	7.4	8.5	9.5
	Light level	(lux)	3 610	1 605	900	580	400	295	230	180

EUROPE

Zoom Profile Spotlights 1000 / 1200 W

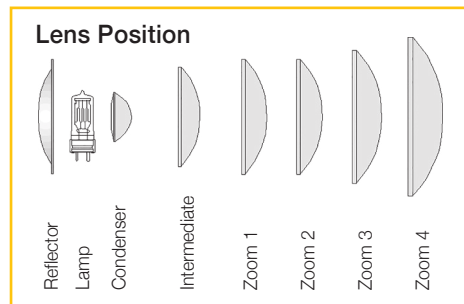

Accessories (specific data sheet available)	DVW 105	DW 105	DS 105	DSN 105	DN 105	References
Metal filter frame (185 x 185 mm)	•	•	•	•		PFM/185
Metal filter frame (245 x 245 mm)					•	PFM/245
Safety grid (185 x 185 mm)	•	•	•	•		GR/185
Safety grid (245 x 245 mm)					•	GR/245
"A" size gobo holder with retention ring	•	•	•	•	•	SP-GO/A
"B" size gobo holder	•	•	•	•	•	SP-GO/B
Iris diaphragm Ø 75	•	•	•	•	•	OR/75
Iris diaphragm Ø 80	•	•	•	•	•	OR/80
Iris diaphragm Ø 80 with black-out	•	•	•	•	•	OR/80/BO
Hook clamp for Ø 35 to 50 mm tubes	•	•	•	•	•	A20
Hook clamp for Ø 35 to 50 mm tubes	•	•	•	•	•	A25
Hook clamp for Ø 45 to 60 mm tubes	•	•	•	•	•	A30
1.2 m spotlight safety cable	•	•	•	•	•	CAS 120/N

Spare Parts						References
2 m cable (2 x 1.5 + 1.5 mm ²) without male plug	•	•	•	•	•	C. EUROPE
CEE 22 female plug	•	•	•	•	•	CEE22/PLUG
GX9.5 lampholder kit	•	•	•	•	•	KIT/GX9,5/D1
Ø 68 mm condenser lens	•	•	•	•	•	LDOC68
Ø 89 mm intermediate PC lens	•	•	•	•	•	PC89/RC70,4
Ø 114 mm zoom 1 PC lens			•		•	PC114/RC150
zoom 2 PC lens	•					PC114/RC150
zoom 4 PC lens	•					PC114/RC150
Ø 114 mm zoom 1 PC lens	•	•				PC114/RC163
Ø 114 mm zoom 1 PC lens				•		PC114/RC216
zoom 2 PC lens		•				PC114/RC216
Ø 152 mm zoom 2 PC lens			•			PC152/RC163
zoom 3 PC lens	•	•				PC152/RC163
Ø 152 mm zoom 2 PC lens				•		PC152/RC190
Ø 203 mm zoom 2 PC lens					•	PC203/RC245
Set of 4 beam shaping shutters	•	•	•	•	•	CM/D105-205
Retention ring for gobo size A	•	•	•	•	•	RR/GO/A

DS-5153-E-03r Subject to modifications