


Key Diameter 10%-50%: beam diameter for 10% and 50% of maximum illumination.
Legenda Diameter 10%-50%: valori del diametro del fascio luminoso corrispondenti al 10% e 50% dell'illuminamento massimo.
Legende Diameter 10%-50%: Lichtkreis-Durchmesser bei 10% bzw. 50% maximaler Ausleuchtung.
Leyenda Diameter 10%-50%: valores del diámetro del haz luminoso correspondientes al 10% y 50% de la iluminación máxima.
Légende Diameter 10%-50%: valeurs du diamètre du faisceau lumineux correspondant à 10% et 50% de l'éclairage maximum.

Minimum Zoom


RED (23° 10% - 12° 50%)

Total Output: 250 lumens

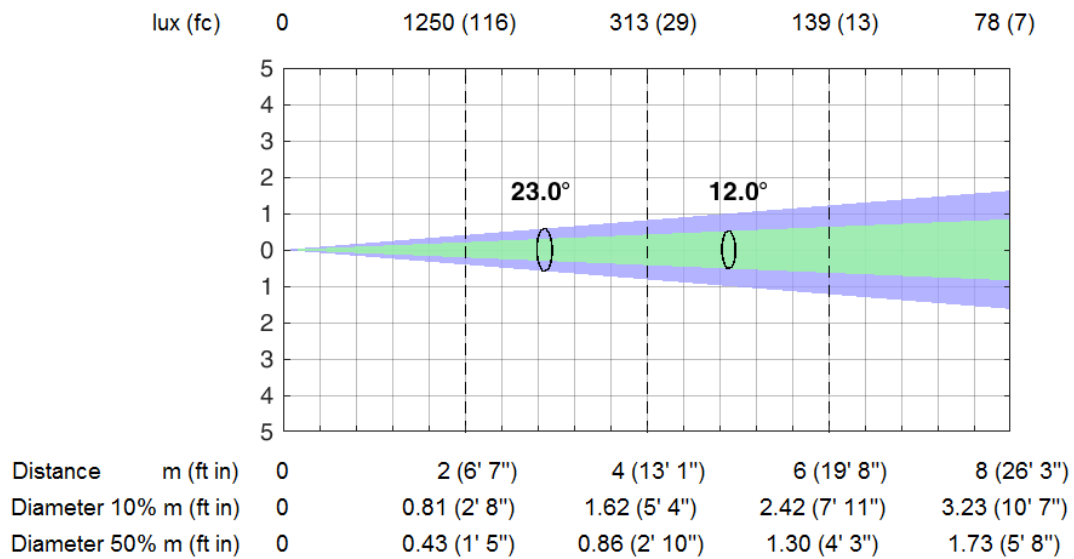


AMBER (23° 10% - 12° 50%)

Total Output: 900 lumens

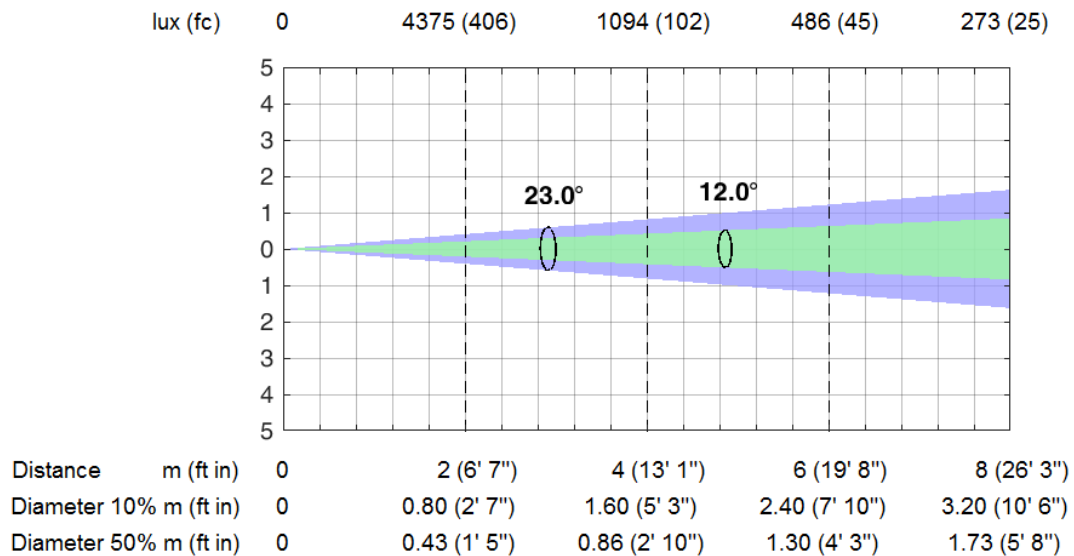


LIME (23° 10% - 12° 50%)

Total Output: 1550 lumens

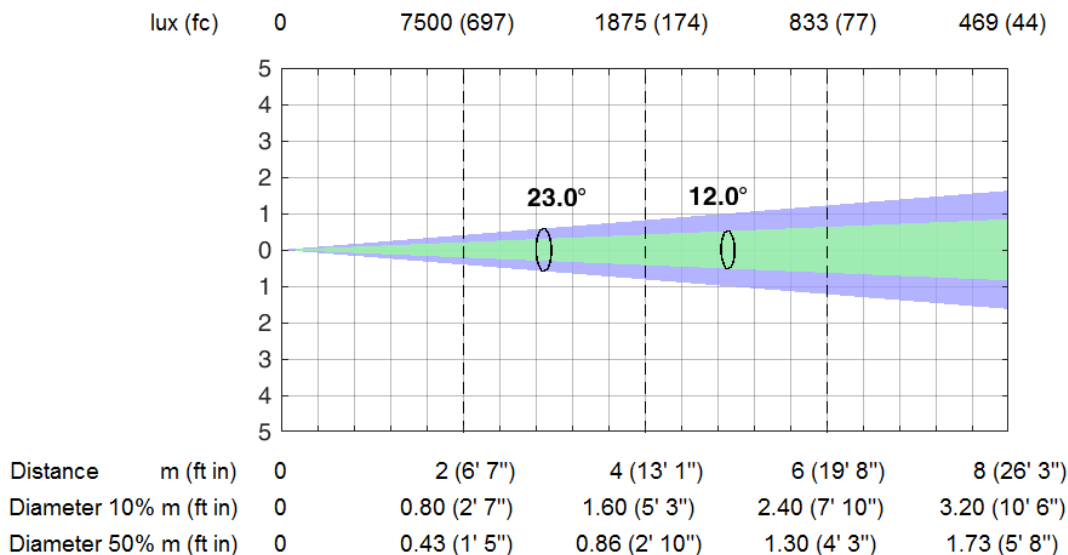


GREEN (23° 10% - 12° 50%)

Total Output: 600 lumens

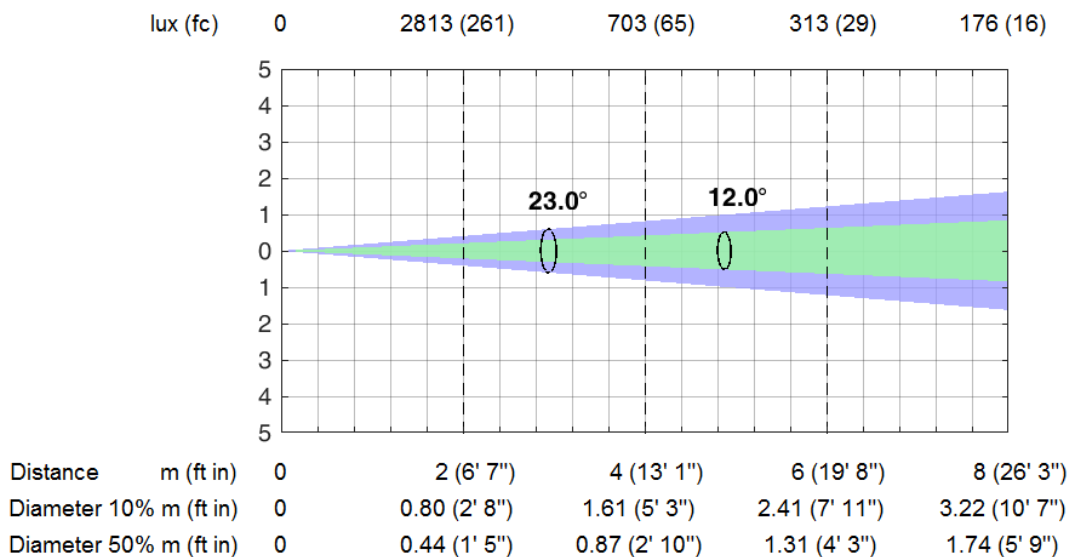


CYAN (23° 10% - 12° 50%)

Total Output: 300 lumens

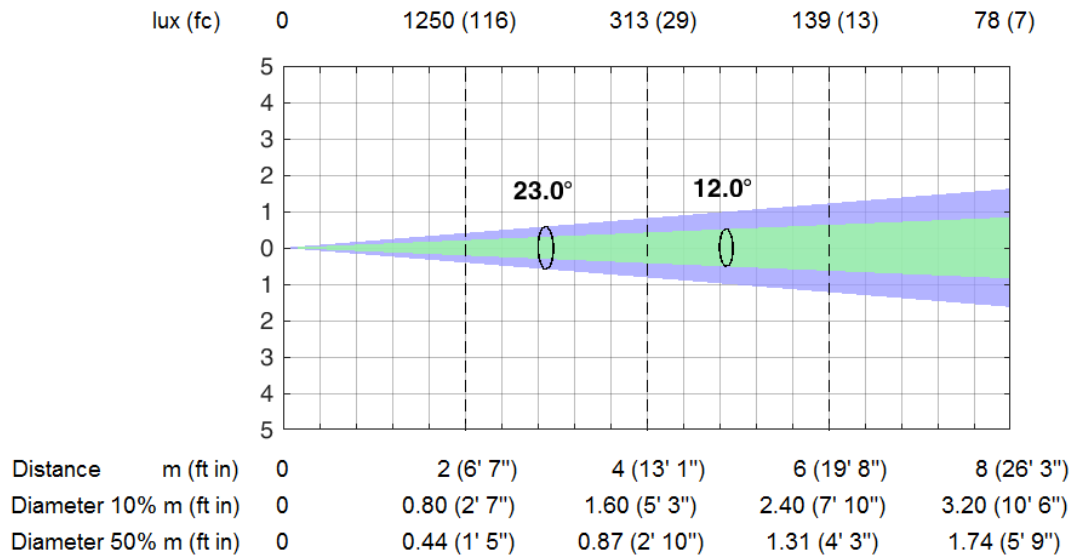


BLUE (23° 10% - 12° 50%)

Total Output: 80 lumens

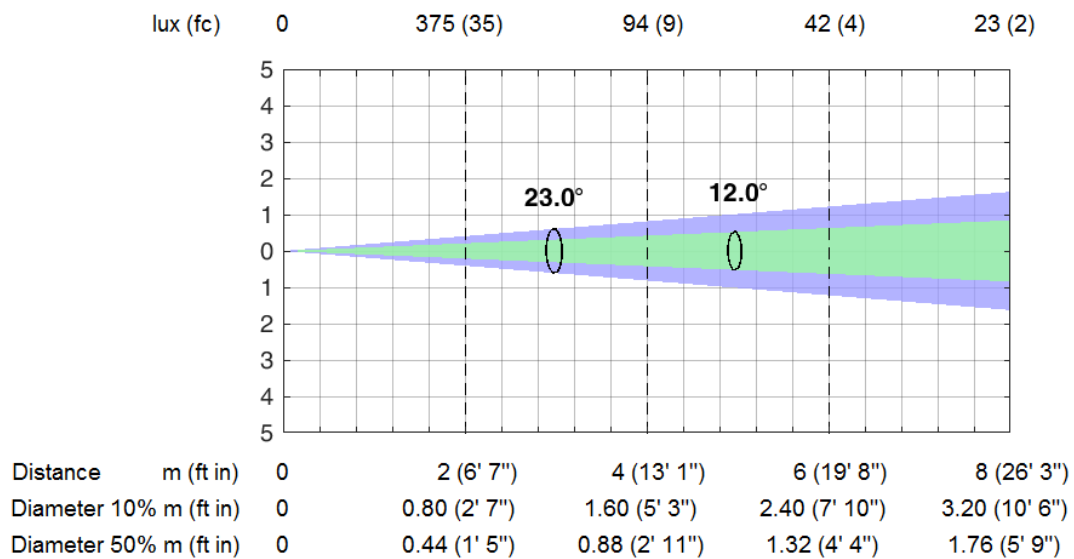


FULL COLORS (23° 10% - 12° 50%)

Total Output: 3500 lumens

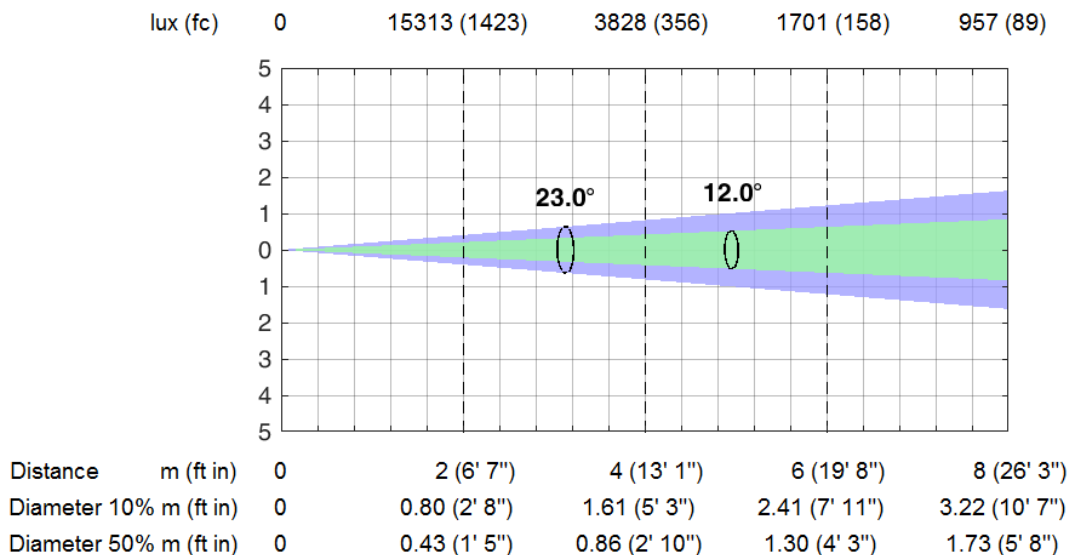

CTO 0,5% (23° 10% - 12° 50%)

Total Output: 2800 lumens

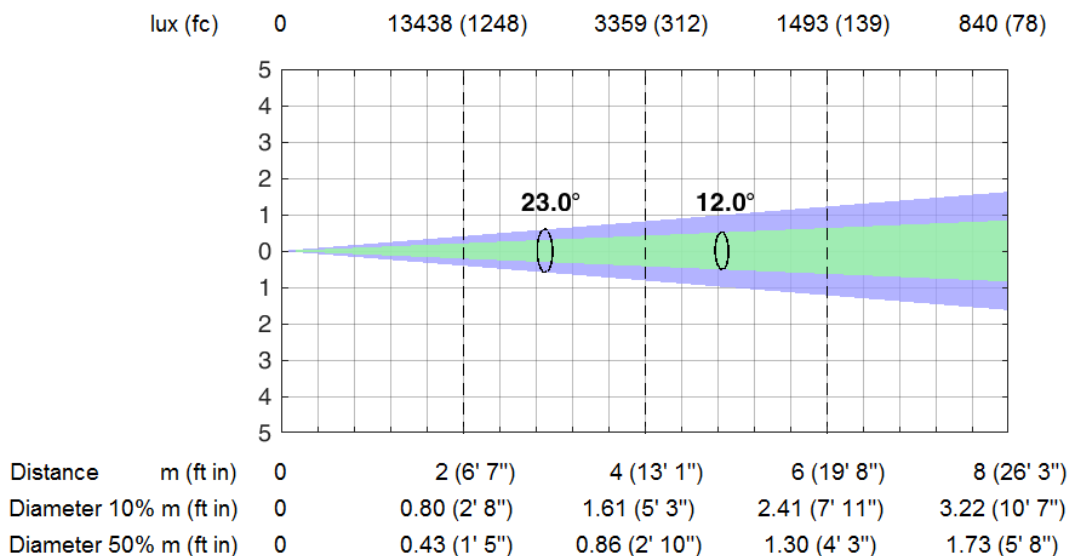

Orkis Pebble M


EN PHOTOMETRIC DIAGRAMS
IT DIAGRAMMI FOTOMETRICI
DE FOTOMETRISCHE DIAGRAMME

ES DIAGRAMAS FOTOMÉTRICOS
FR DIAGRAMMES PHOTOMETRIQUES



CTO 100% (23° 10% - 12° 50%)


Total Output: 2050 lumens

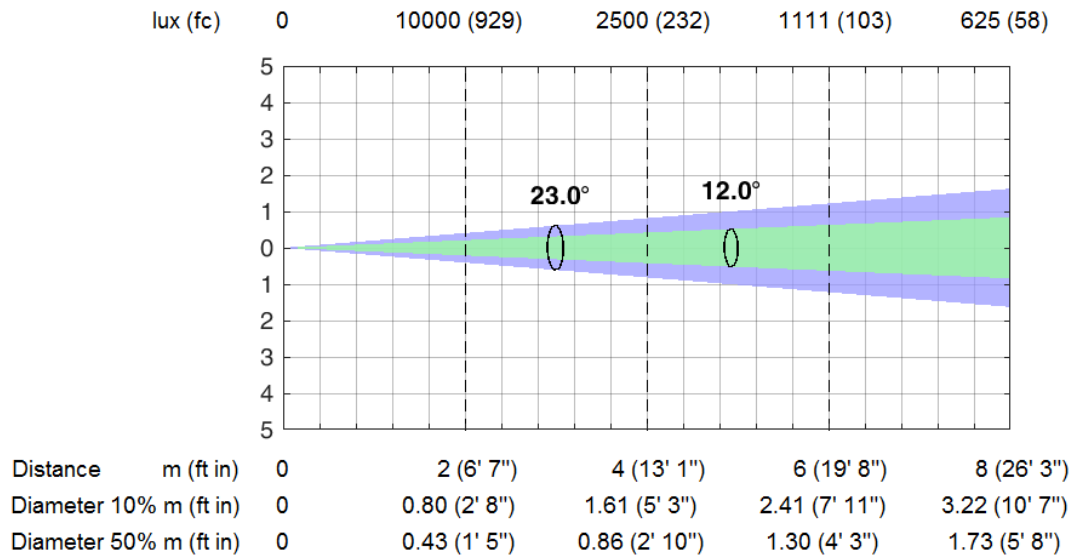

Maximum Zoom

RED (74° 10% - 45° 50%)

Total Output: 400 lumens

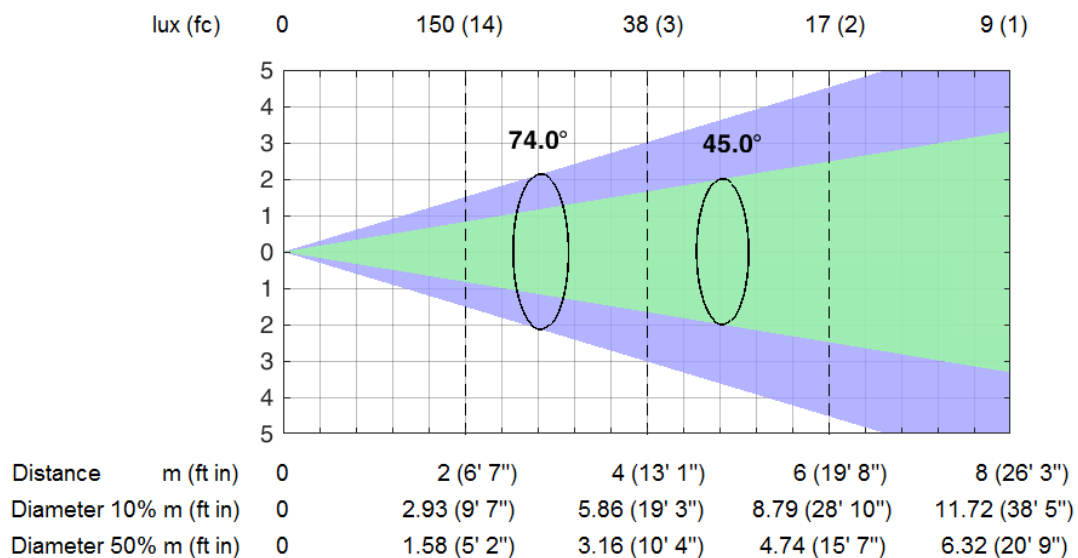

Orkis Pebble M


EN PHOTOMETRIC DIAGRAMS
IT DIAGRAMMI FOTOMETRICI
DE FOTOMETRISCHE DIAGRAMME

ES DIAGRAMAS FOTOMÉTRICOS
FR DIAGRAMMES PHOTOMETRIQUES




AMBER (74° 10% - 45° 50%)

Total Output: 1450 lumens

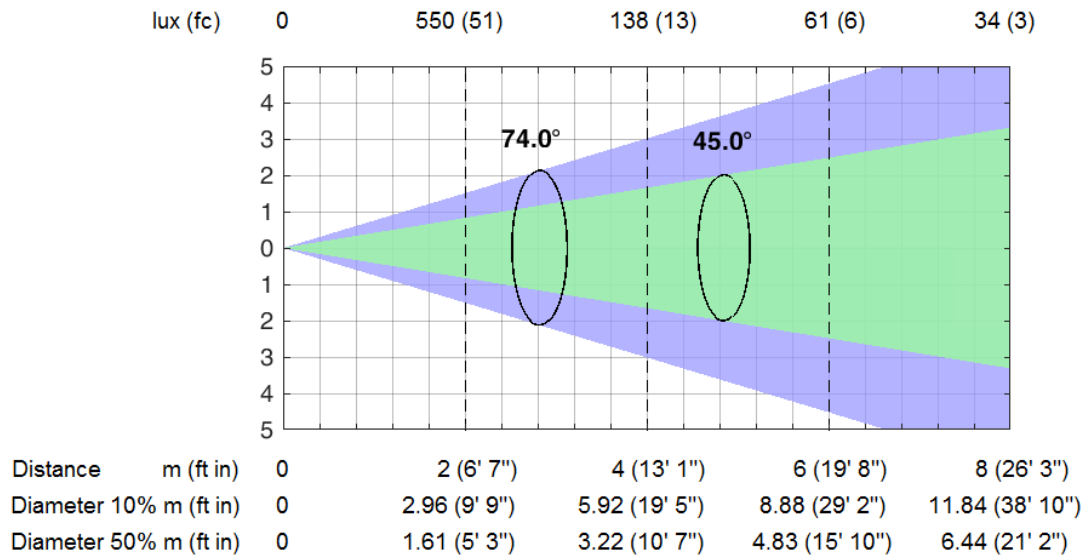

LIME (74° 10% - 45° 50%)

Total Output: 2600 lumens

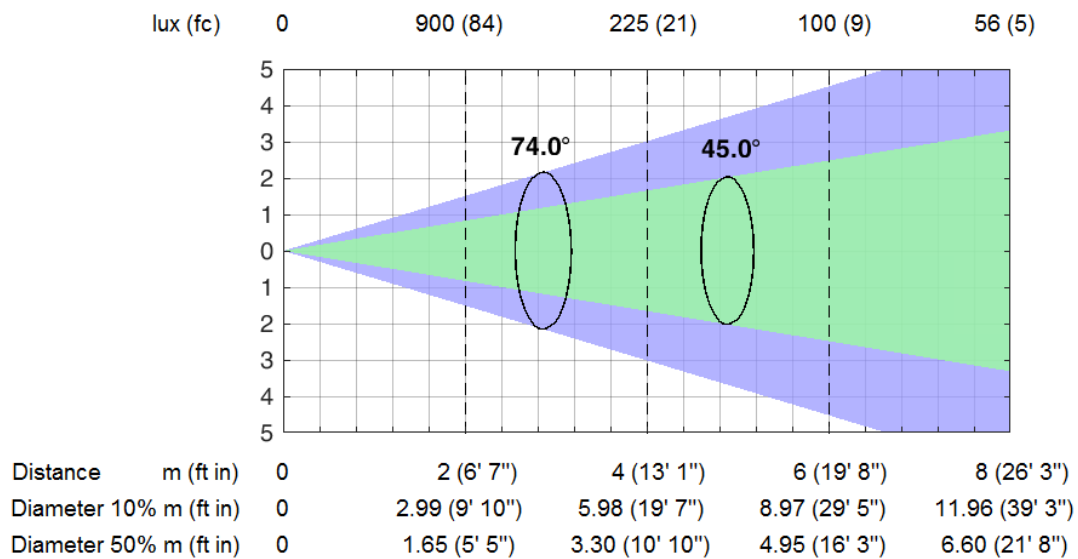

Orkis Pebble M


EN PHOTOMETRIC DIAGRAMMS
IT DIAGRAMMI FOTOMETRICI
DE FOTOMETRISCHE DIAGRAMME

ES DIAGRAMAS FOTOMÉTRICOS
FR DIAGRAMMES PHOTOMETRIQUES




GREEN (74° 10% - 45° 50%)

Total Output: 1000 lumens

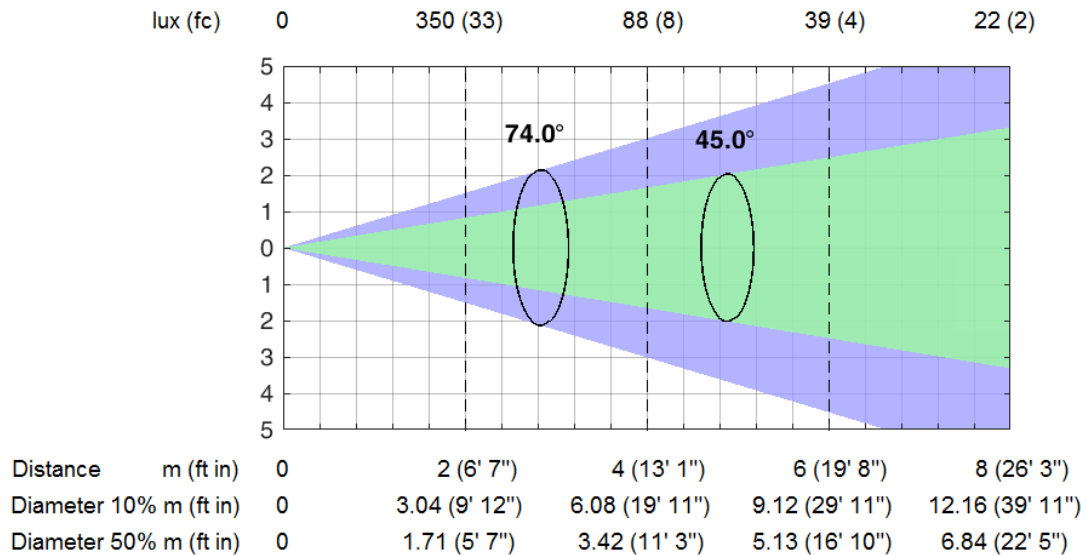

CYAN (74° 10% - 45° 50%)

Total Output: 500 lumens

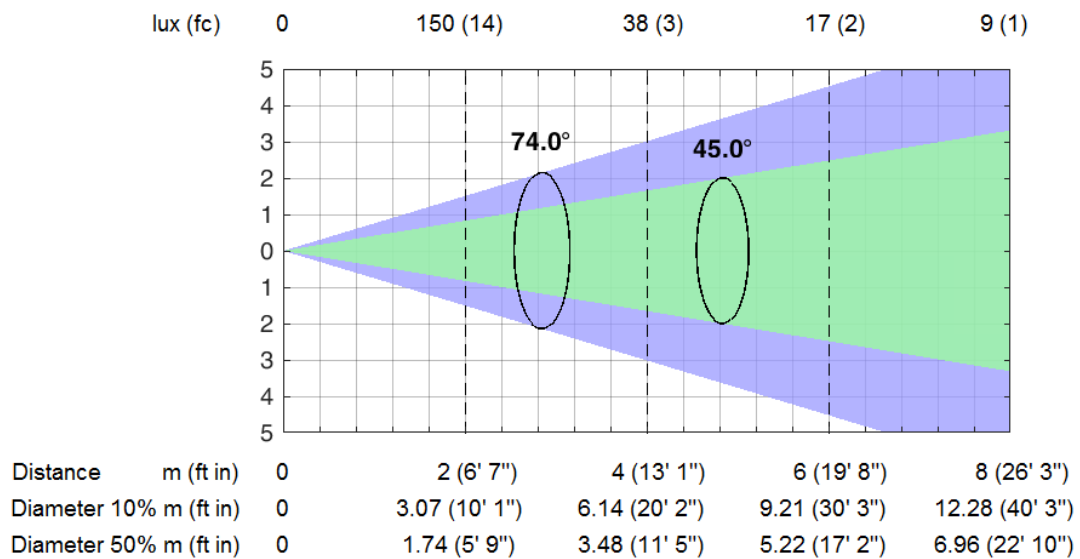

Orkis Pebble M


EN PHOTOMETRIC DIAGRAMS
IT DIAGRAMMI FOTOMETRICI
DE FOTOMETRISCHE DIAGRAMME

ES DIAGRAMAS FOTOMÉTRICOS
FR DIAGRAMMES PHOTOMETRIQUES




BLUE (74° 10% - 45° 50%)

Total Output: 150 lumens

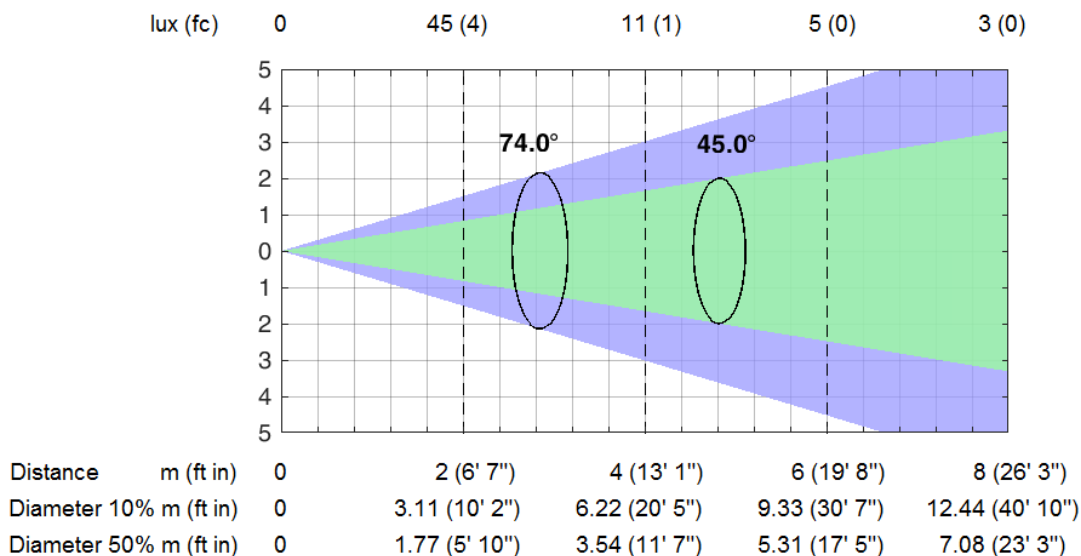

FULL COLORS (74° 10% - 45° 50%)

Total Output: 5500 lumens

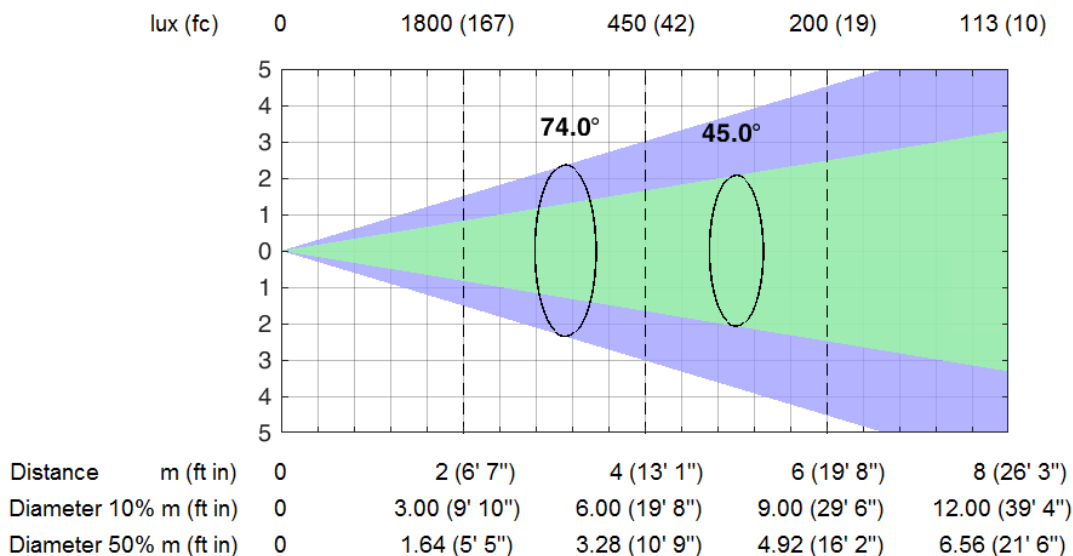

Orkis Pebble M


EN PHOTOMETRIC DIAGRAMS
IT DIAGRAMMI FOTOMETRICI
DE FOTOMETRISCHE DIAGRAMME

ES DIAGRAMAS FOTOMÉTRICOS
FR DIAGRAMMES PHOTOMETRIQUES



CTO 0,5% (74° 10% - 45° 50%)

Total Output: 4500 lumens

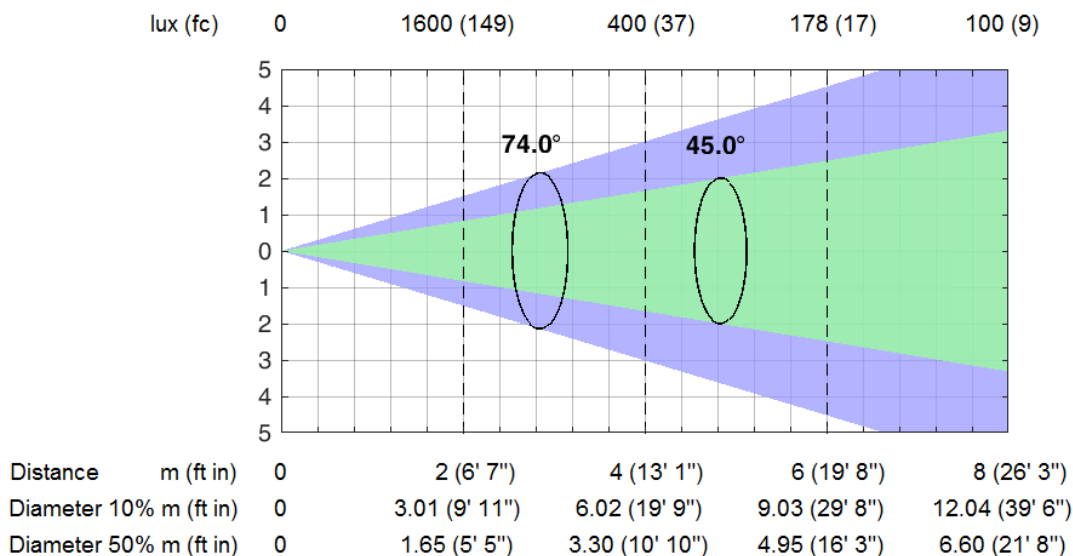

CTO 100% (74° 10% - 45° 50%)

Total Output: 3500 lumens

